

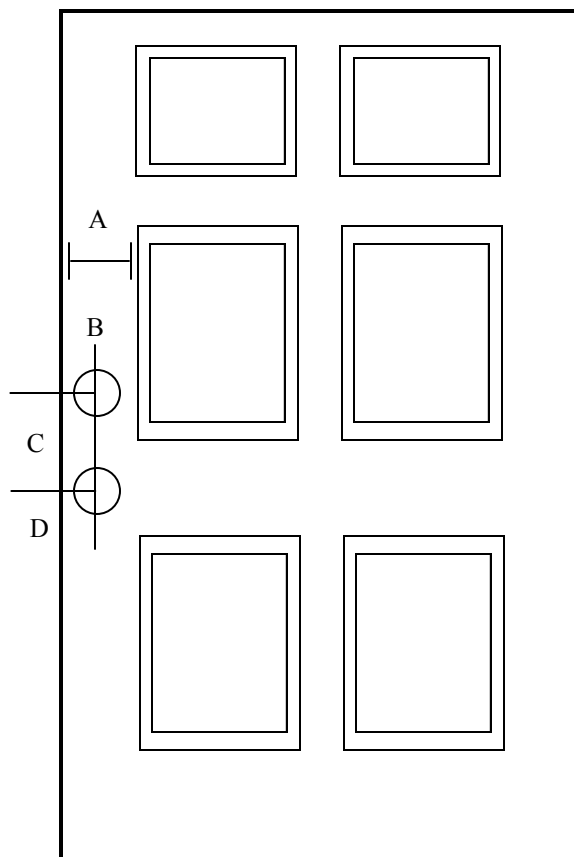


- A. Width of the style of the door**
Measure from edge of door to the edge of paneling or glass.
- B. Backset of existing hole(s).**
Measure from the outside edge of the door top the center of the hole, usually either 2 3/8" or 2 3/4"
- C. If two holes are present**
Measure from the center of the top hole to the center of the bottom hole. (Standard is 5 1/2")
- D. Diameter of existing hole(s)**
Measure the diameter of all existing holes
- E. Measure the door thickness** Exterior 1 3/4" Standard and up
Interior 1 3/8" to 1 3/4" Standard
- F. See handing chart below to determine the swing of each door**

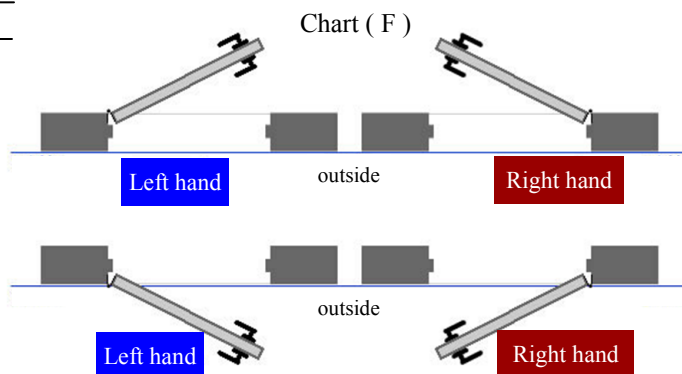

- A. Style Width: _____
- B. Existing Backset: _____
- C. Center to Center: _____
- D. Hole Diameter: _____
- E. Door Thickness: _____
- F. Hand of Door: _____

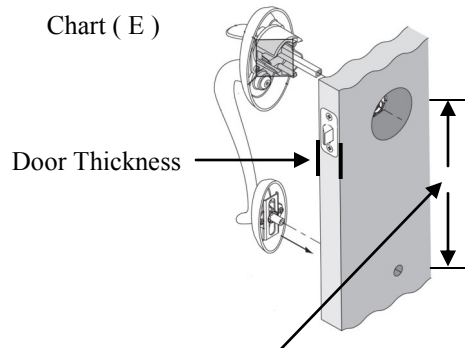

If there are any other additional holes for the existing lockset measure center to center dimension from the knob, lever or thumb latch. _____

Follow These Steps Handing The Door

1. Stand facing the door on the outside - If it's a locking door, stand on the side of the door where you would insert a key (or unlocking tool if it would be a privacy lock). For interior doors you would stand on the side of the door you enter from.
2. If the hinges are on the left, it's a left hand door. If the hinges are on the right, it's a right hand door and if the door swing out it becomes a reverse bevel.